


POSITIVE PULSE MWD

Diameter:	1.88"	
Tool Sizes:	3.5", 4.75", 6.25", 6.5", 8", 9.5"	
Temperature Rating:	150 C (302 F)	
Vibration Rating:	35g RMS	
Shock Rating:	1000g Peak	
Pressure Rating:	20,000 psi (137,900 kPa)	
Sensor Ratings:	Inclination: +- 0.1 Degrees	
	Azimuth: +- 0.5 Degrees	
	Toolface: +- 0.5 Degrees	
	Temperature: +- 1 Degree Celsius	
Power Output Max:	70 Watts (During Pulse)	
Battery Life:	Single Battery:	175-200 Hrs
Length:	Directional Only:	25'
	Directional and Gamma:	32'
	With Second Battery:	39'
Maximum LCM:	40-50 ppb concentration	
Flow Ranges:	3.5" OD:	75-165 gallons per minute
	4.75" OD:	100-300 gallons per minute
	6.5" OD:	150-600 gallons per minute
	8.25" OD:	400-1200 gallons per minute

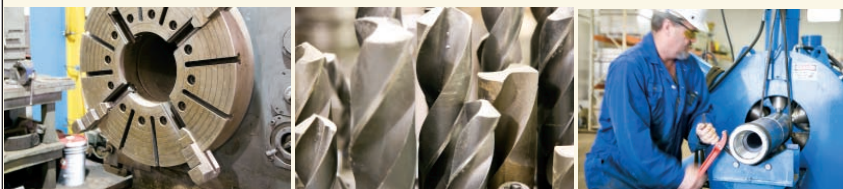

mostardirectional.com

Mostar Directional Technologies Inc.
3531 78 Avenue S.E.
Calgary, AB T2C 1J7
Tel: 403.279.5577
Fax: 403.236.7598
ddinfo@mostardirectional.com
Technical Sales & Well Planning
1220 630 – 6 Avenue S.W.
Calgary, AB T2P 0S8
Tel: 403.205.4646